


Product Spec Sheet
Master Clock Generator
CG-2000



■ **Specifications**

Inputs and outputs

VIDEO INPUTS

- Connector type: BNC
- Input level: 0.5–2.0 Vp-p
- Input impedance: 75 Ω (can turn ON/OFF in menu)
- Input format
 - SD video black burst:
 - NTSC (RS-170A)
 - PAL (ITU-R624)
 - SD video composite sync:
 - NTSC B/W (RS-170)
 - HD video tri-level:
 - 720p/50/59.94/60 (SMPTE 296M)
 - 1080p/23.976/24/25/29.97/30/50/59.94/60 (SMPTE 274M)
 - 1080i/23.976/24/25/29.97/30 (SMPTE 274M)
 - 1080PsF/23.976/24/25/29.97/30 (SMPTE RP211)
- Permissible frequency deviation: ±10 ppm

WORD/EXT INPUTS

- Connector type: BNC
- Input level: 0.5–5.0 Vp-p
- Input impedance: 75/50 Ω (can set to 75/50/OFF in menu)
- Supported frequencies
 - WORD CLOCK: 32/44.1/48/88.2/96/176.4/192 kHz
(–4/–0.1/0.0/+0.1/+4% PULL UP/DOWN supported only when 48/96/192 kHz selected)
 - ATOM: 10.0 MHz
 - GPS: 10.0 MHz
- Permissible frequency deviation: ±10 ppm

AES3/11 INPUT

- Connector type: XLR-3-31 (1: GND, 2: HOT, 3: COLD)
- Input level: 0.2–10 Vp-p
- Input impedance: 110 Ω
- Format: AES11-2003, AES3-2003, IEC60958-4
- Supported frequencies: 32/44.1/48/88.2/96/176.4/192 kHz
(–4/–0.1/0.0/+0.1/+4% PULL UP/DOWN supported only when 48/96/192 kHz selected)
- Permissible frequency deviation: ±10 ppm

CALIBRATION INPUT

Connector type:	BNC
Input level:	0.5–5.0 V _{p-p}
Input impedance:	50 Ω (can turn ON/OFF in menu)
Supported frequencies	
ATOM:	10.0 MHz
GPS:	10.0 MHz, PPS

VIDEO OUTPUTS

Connector type:	BNC
Output impedance:	75 Ω
Output format	
SD video black burst:	
NTSC (RS-170A)	
PAL (ITU-R624)	
SD video composite sync:	
NTSC B/W (RS-170)	
HD video tri-level:	
720p/50/59.94/60 (SMPTE 296M)	
1080p/23.976/24/25/29.97/30/50/59.94/60 (SMPTE 274M)	
1080i/23.976/24/25/29.97/30 (SMPTE 274M)	
1080PsF/23.976/24/25/29.97/30 (SMPTE RP211)	

WORD OUTPUTS

Connector type:	BNC connector
Output level:	1.0–3.5 V _{p-p} (can set by 0.5V steps in menu)
Output impedance:	75 Ω
Supported frequencies:	32/44.1/48/88.2/96/176.4/192 kHz
	11.2896/12.288 MHz (Super Clock, only connectors 11/12)
	(–4/–0.1/0.0/+0.1/+4% PULL UP/DOWN supported only when 48/96/192 kHz selected)

AES3/11 OUTPUTS

Connector type:	XLR-3-32 (1: GND, 2: HOT, 3: COLD)
Output level:	2.5 V _{p-p}
Output impedance:	110 Ω
Format:	AES11-2003, AES3-2003, IEC60958-4
Supported frequencies:	32/44.1/48/88.2/96/176.4/192 kHz
	(–4/–0.1/0.0/+0.1/+4% PULL UP/DOWN supported only when 48/96/192 kHz selected)

S/PDIF OUTPUTS

Connector type:	RCA pin jack
Output level:	0.5 V _{p-p}
Output impedance:	75 Ω
Format:	IEC60958-3 (S/PDIF)
Supported frequencies:	32/44.1/48/88.2/96/176.4/192 kHz
	(–4/–0.1/0.0/+0.1/+4% PULL UP/DOWN supported only when 48/96/192 kHz selected)

ALARM OUTPUT

Connector type:	6-pin Euroblock connector
Output format:	Open collector
Output impedance:	10 Ω
Resistance:	20 V
Maximum current:	50 mA

Performance

Internal oscillator

Type:	OCXO (oven-controlled crystal oscillator)
Permitted frequency deviation:	± 0.01 ppm (Adjusted value when shipped new from the factory)
Frequency temperature characteristics:	± 0.05 ppm (0 to 40°C)
Long-term frequency stability:	± 0.005 ppm (daily) ± 0.5 ppm (annually)

General

Power

AC100 V–240 V, 50/60Hz

Power consumption

14 W

External dimensions

483 x 45 x 310mm (width × height × depth)


Weight

3.3 kg (7.3 lb)

Operating temperature range

0–40°C (32–104°F)

■ Dimensional drawings

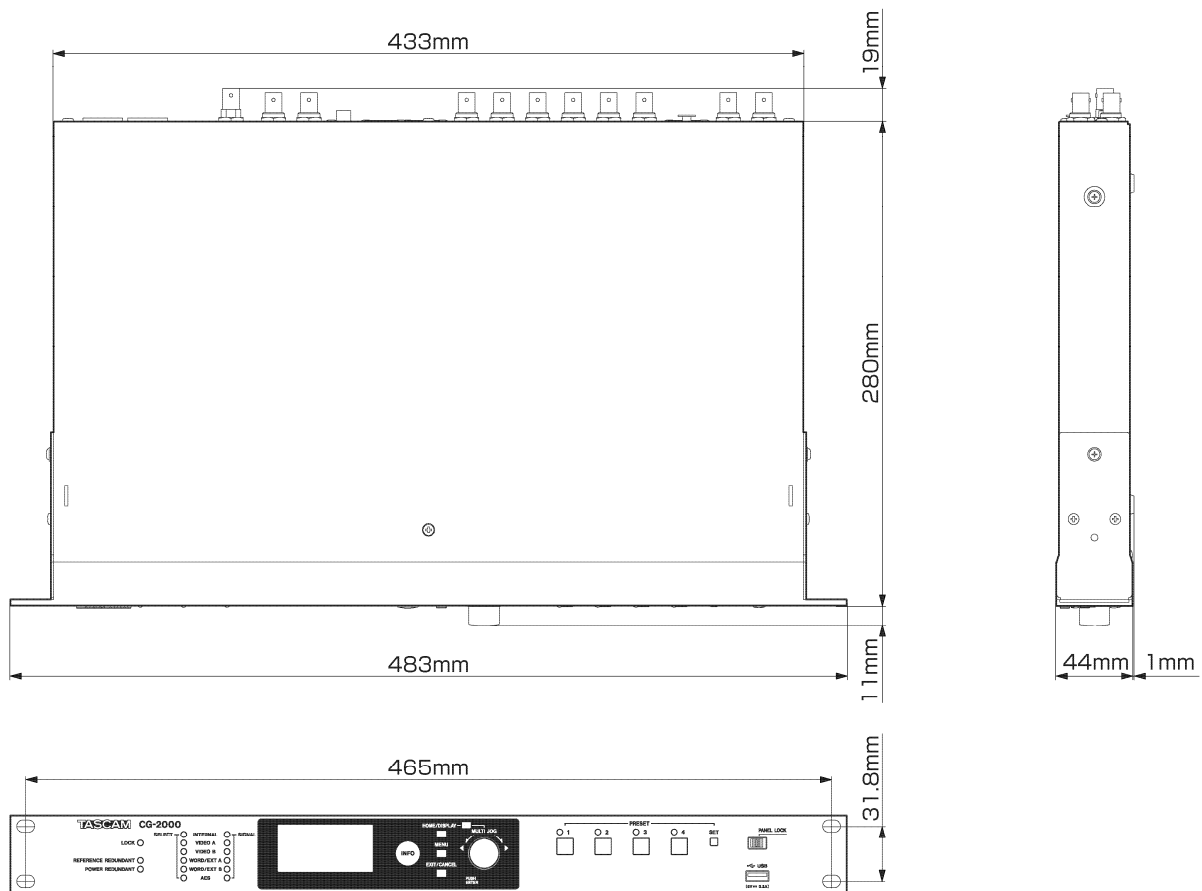

※TASCAM is trademark of TEAC CORPORATION, registered in the U.S. and other countries.
 ※Other company names, product names and logos are the trademarks or registered trademarks of their owners.
 ※Specifications and appearance are subject to change without notice.
 ※All information included in this document is as of Feb, 2015.