

## BC-5000-2

### BATTERY CHARGER



The TOA BC-5000-2 is a dedicated battery charger for the WM-5225 and WM-5265 Wireless Microphones, WM-5325 Wireless Transmitter, and WT-5100 Portable Receiver. It works with the optional AD-5000-2 AC Adapter. The BC-5000-2 employs a quick charging system for nickel-metal hydride (Ni-MH) batteries, allowing up to 2 units to be fully charged within 3 hours.


### Key features

- Charging station for the transmitters of the 5000 series
- Up to 2 transmitters can be fully recharged in only 3 hours

## Specifications

Power Source	12 V DC (optional AC adapter AD-5000-2 must be used)
Current Consumption	700 mA
Charging Time	Max. 3 h
Number of Units to be Charged Simultaneously	2 pieces
Operating Temperature	0 # to +40 # (32 # to 104 #)
Operating Humidity	30 % to 85 %RH (no condensation)
Finish	Case: ABS resin, gray Microphone receptacle section: PPE resin, black
Dimensions	238 (W) x 105 (H) x 98 (D) mm (9.37" x 4.13" x 3.86") (including mounting adapter)
Weight	500 g (1.1 lb) (charger with the mounting adapters attached)
Included Accessories	Mounting adapter ...2
Optional Accessories	Rechargeable battery: WB-2000-2 (containing 2 pieces) AC adapter: AD-5000-2

## Dimensions

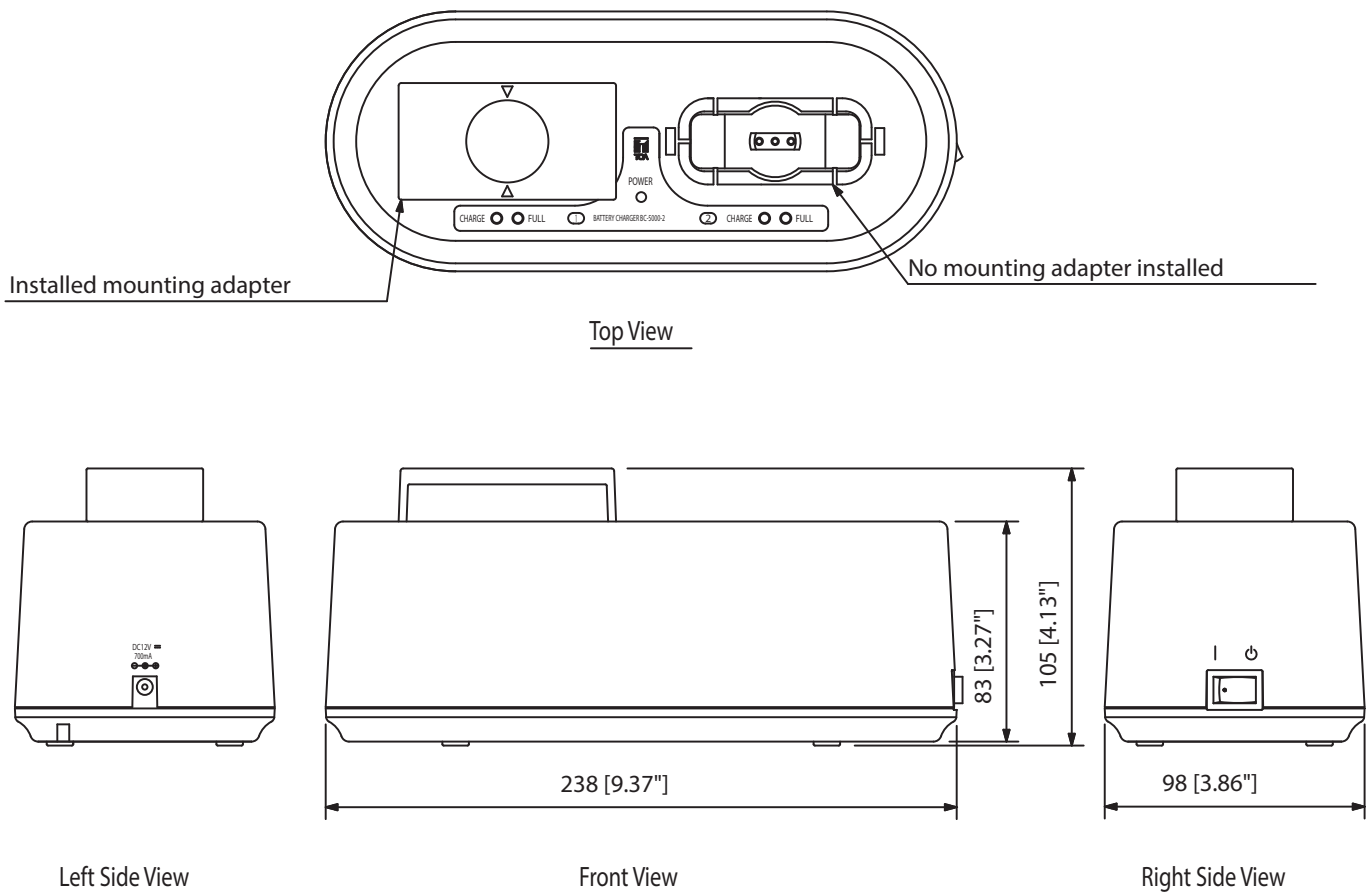

UNIT:mm

SCALE:1/3